


PROJOLLY SQUARE

ANODIZED ALUMINIUM

PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

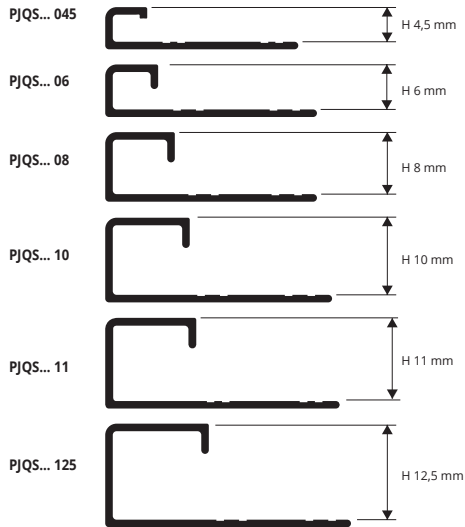

ANODIZED ALUMINIUM thermo Packed (silver-gold-copper-titanium)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)




ANODIZED ALUMINIUM thermo Packed (black-grey gun)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm		
PJQSAA 045	4,5		
PJQSAA 06	6		
PJQSAA 08	8		
PJQSAA 10	10		
PJQSAA 11	11		
PJQSAA 125	12,5		
PJQSAO 08	8		
PJQSAO 10	10		
PJQSAO 125	12,5		
PJQSAR 045	4,5		
PJQSAR 06	6		
PJQSAR 08	8		
PJQSAR 10	10		
PJQSAR 125	12,5		
PJQSAT 045	4,5		
PJQSAT 06	6		
PJQSAT 08	8		
PJQSAT 10	10		
PJQSAT 11	11		
PJQSAT 125	12,5		

Article	H mm		
PJQSNE 06	6		
PJQSNE 08	8		
PJQSNE 10	10		
PJQSNE 11	11		
PJQSNE 125	12,5		
PJQSAG 06	6		
PJQSAG 08	8		
PJQSAG 10	10		
PJQSAG 11	11		
PJQSAG 125	12,5		

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

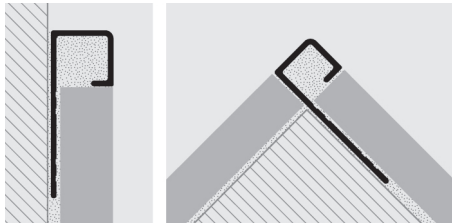

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED ALUMINIUM / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm		
CPJQSAA .../...	045/06/08/10/11/125		
TPJQSAA .../...	045/06/08/10/11/125		
CPJQSAO .../...	8/10/125		
TPJQSAO .../...	8/10/125		
CPJQSAR .../...	045/06/08/10/125		
TPJQSAR .../...	045/06/08/10/125		
CPJQSAT .../...	045/06/08/10/11/125		
TPJQSAT .../...	045/06/08/10/11/125		
CPJQSNE .../...	08/10/11/125		
TPJQSNE .../...	08/10/11/125		

CPJQSAG .../... 06/08/10/11/125


TPJQSAG .../... 06/08/10/11/125

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSAA 10/10

JOINTS - PLASTIC

Article	H mm		
GIJQ .../...	045/06/08/10/11/125		

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

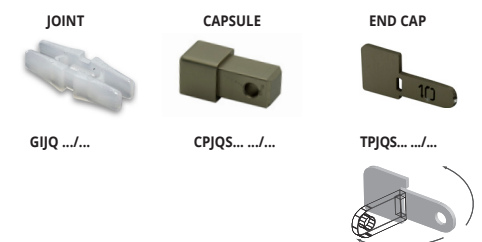

= News 2024

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed



PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

POLISHED ALUMINIUM




POLISHED ALUMINIUM thermo Packed (chrome-gold-titanium-copper)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

POLISHED ALUMINIUM thermo Packed (black-grey gun) bar length 2,7 lm -
Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm		
PJQSBC 045	4,5		*
PJQSBC 06	6		
PJQSBC 08	8		
PJQSBC 10	10		
PJQSBC 11	11		
PJQSBC 125	12,5		
PJQSBO 08	8	*	
PJQSBO 10	10		
PJQSBO 125	12,5		
PJQSBR 045	4,5	*	
PJQSBR 06	6		
PJQSBR 08	8	*	
PJQSBR 10	10		
PJQSBR 125	12,5		
PJQSBT 045	4,5	*	
PJQSBT 06	6		
PJQSBT 08	8		
PJQSBT 10	10		
PJQSBT 11	11		
PJQSBT 125	12,5		


Article	H mm		
PJQSBN 08	8		
PJQSBN 10	10		
PJQSBN 11	11		
PJQSBN 125	12,5		
PJQSBG 06	6	*	
PJQSBG 08	8		
PJQSBG 10	10		
PJQSBG 11	11		
PJQSBG 125	12,5		

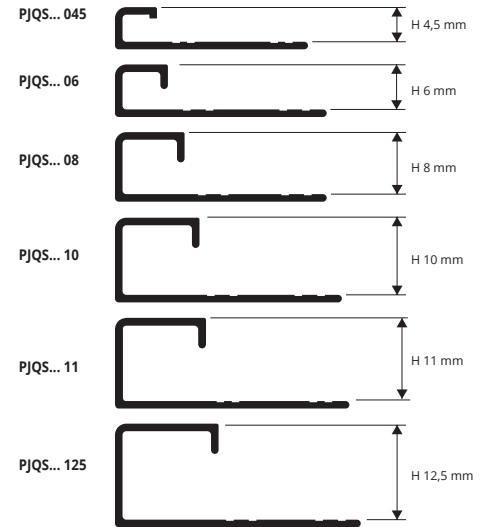

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

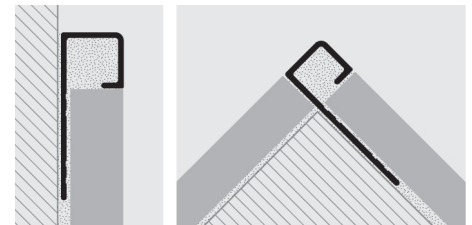

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED ALUMINIUM / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm		
CPJQSBC .../...	045/06/08/10/11/125		
TPJQSBC .../...	045/06/08/10/11/125		
CPJQSBO .../...	8/10/125		
TPJQSBO .../...	8/10/125		
CPJQSBR .../...	045/06/08/10/125		
TPJQSBR .../...	045/06/08/10/125		
CPJQSBT .../...	045/06/08/10/11/125		
TPJQSBT .../...	045/06/08/10/11/125		
CPJQSBN .../...	08/10/11/125		
TPJQSBN .../...	08/10/11/125		

CPJQSBG .../... 06/08/10/11/125


TPJQSBG .../... 06/08/10/11/125

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBC 10/10

JOINTS - PLASTIC

Article	H mm		
GIJQ .../...	045/06/08/10/11/125		

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

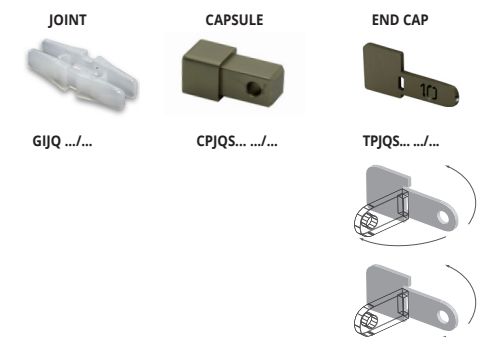

News 2024

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed