

**PROJOLLY ECO MARBLE** is a rounded bead profile in shockproof non-toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of different marble effect finishes, also on demand, and special pieces such as internal and external corners make **PROJOLLY ECO MARBLE** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

# PROJOLLY ECO MARBLE

SHOCKPROOF NON-TOXIC MARBLED VINYL RESIN



### SHOCKPROOF MARBLED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE... 06	6		*
PJE... 08	8		
PJE... 10	10		

#### ARTICLES NOT FOR SALE SINGLY

PJE... 125 available on demand.

Available in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS ( on demand MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).

The code of the selected colour must be added to the article code.

E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

### SHOCKPROOF MARBLED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm		
PJE... 07	7		*
PJE... 09	9		*


#### ARTICLES NOT FOR SALE SINGLY

#### PRODUCTION ON DEMAND MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGH (Production delay 4/5 weeks)


Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS - MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs.

The code of the selected colour must be added to the article code.

E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

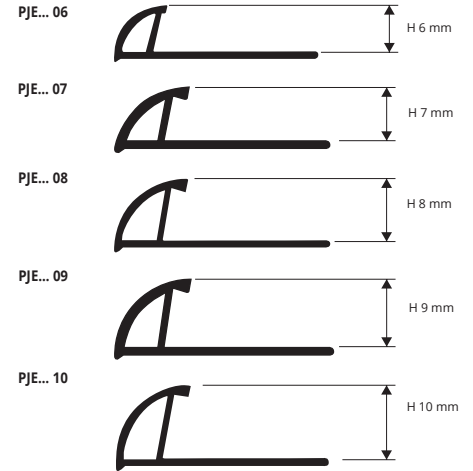

#### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

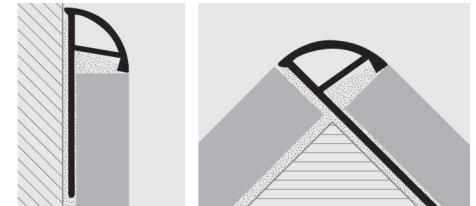

1. Choose "PROJOLLY ECO MARBLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY ECO MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY ECO MARBLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

#### COLOURS



#### AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)



\* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed