

PROJOLLY TRIANGLE

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY TRIANGLE is a triangle-shaped bead profile polished, super polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PJTRAC... 06



PJTRAC... 08



PJTRAC... 10



PJTRAC... 11



PJTRAC... 125



PJTRAC... 15



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm
PJTRAC 06	6
PJTRAC 08	8
PJTRAC 10	10
PJTRAC 11	11
PJTRAC 125	12,5
PJTRAC 15	15

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm
PJTRACS 06	6
PJTRACS 08	8
PJTRACS 10	10
PJTRACS 11	11
PJTRACS 125	12,5
PJTRACS 15	15

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm
PJTRACML 06	6
PJTRACML 08	8
PJTRACML 10	10
PJTRACML 11	11
PJTRACML 125	12,5
PJTRACML 15	15




COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACML - Super polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

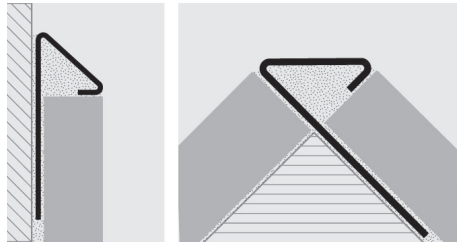

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - POLISHED STAINLESS STEEL

Article	H mm
CPJTRAC .../...	06-08-10-11-12,5-15
IPJTRAC .../...	06-08-10-11-12,5-15
CTPJTRAC .../...	06-08-10-11-12,5-15
TPJTRAC .../...	06-08-10-11-12,5-15

Choose the desired packaging: E.g.: CPJTRAC.../10 (Pack. 10 Pcs)
CPJTRAC.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - SUPER POLISHED STAINLESS STEEL

Article	H mm
CPJTRACML .../...	06-08-10-11-12,5-15
IPJTRACML .../...	06-08-10-11-12,5-15
CTPJTRACML .../...	06-08-10-11-12,5-15
TPJTRACML .../...	06-08-10-11-12,5-15

Choose the desired packaging: E.g.: CPJTRACML.../10 (Pack. 10 Pcs)
CPJTRACML.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES AND and CAPS - BRUSHED STAINLESS STEEL

Article	H mm
CPJTRACS .../...	06-08-10-11-12,5-15
IPJTRACS .../...	06-08-10-11-12,5-15
CTPJTRACS .../...	06-08-10-11-12,5-15
TPJTRACS .../...	06-08-10-11-12,5-15

Choose the desired packaging: E.g.: CPJTRACS.../10 (Pack. 10 Pcs)
CPJTRACS.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

JOINTS - PLASTIC

Article	H mm
GJTRAC .../...	06-08-10-11-12,5-15

Choose the desired packaging: E.g.: GJTRAC.../10 (Pack. 10 Pcs)
GJTRAC.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL CAPSULE INTERNAL CAPSULE THREE-WAYS CAPSULE END CAPS JOINTS

