


PROLISTEL ALL is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL ALL

ANODIZED, POLISHED AND BRUSHED ALUMINIUM

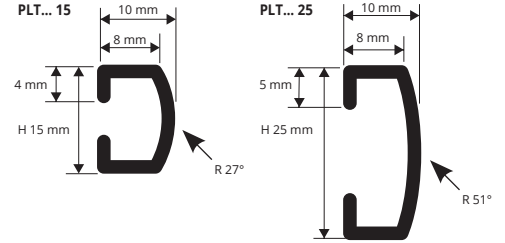

POLISHED ALUMINIUM (chrome)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PLTBC 15	15
PLTBC 25	25

ANODIZED ALUMINIUM (silver)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PLTAA 15	15
PLTAA 25	25


BRUSHED POLISHED ALUMINIUM (silver)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PLTBS 15	15

COLOURS

ANODIZED	POLISHED	BRUSHED POLISHED
AA - Anodized silver alum.	BC - Polished chrome alum.	BS - Brushed polished silver alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

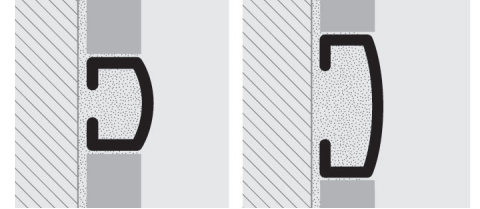


1. Choose "PROLISTEL ALL" according to the width and desired finish.
2. Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H mm
PLTLEDAA 20	20
PLTLEDBC 20	20

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack. 1 ROLL

Article
LEDN
LEDF
LEDC

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.

POLYCARBONATE FLAT bar length 2,7 lm - pack. 20 Pc - 54 lm
(AL = transparent / AO = matt)

Article
PIAL 17
PIAO 17

END CAPS - R/L (3 right & 3 left)

Article	H mm
TPLTLEDAA 20	20
TPLTLEDBC 20	20


LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article
ALL 7512

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article
ALL 2512

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

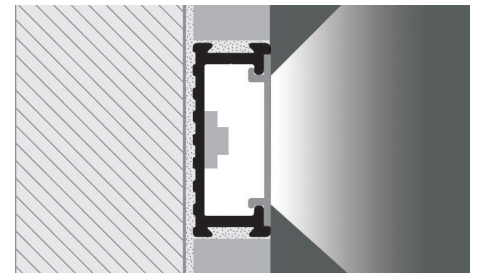

1. Choose "PROLISTEL LED" according to the width and desired finish.
2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL LED" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed