
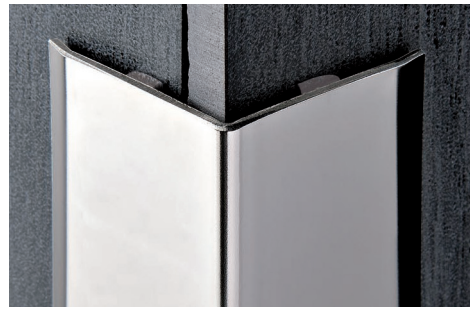


# PROEDGE AC

POLISHED AND BRUSHED  
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make PROEDGE AC a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

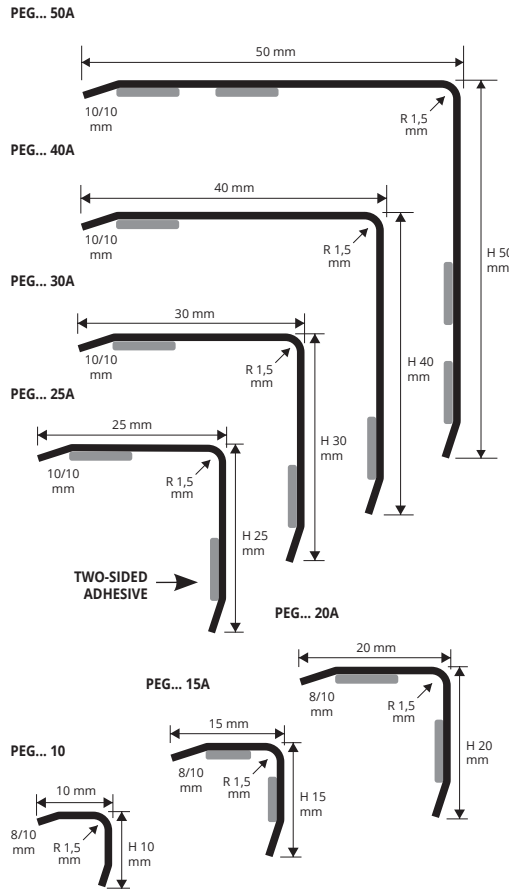

POLISHED AND BRUSHED STAINLESS STEEL  
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm		
PEGAC 10	10 x 10		
PEGACS 10	10 x 10		

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE  
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm


Article	LxH mm		
PEGAC 15A	15 x 15		
PEGACS 15A	15 x 15		
PEGAC 20A	20 x 20		
PEGACS 20A	20 x 20		

For items without adhesive, write the item without the last A.  
E.g.: PEGAC 15

## COLOURS



Suitable for use in contact with foodstuffs.

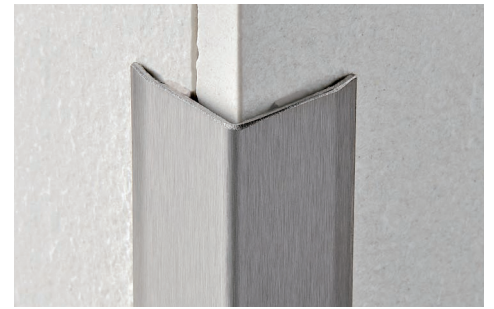

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE  
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm		
PEGAC 25A	25 x 25		
PEGACS 25A	25 x 25		
PEGAC 30A	30 x 30		
PEGACS 30A	30 x 30		

For items without adhesive write the item without the last A.  
E.g.: PEGAC 10

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE  
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm		
PEGAC 40A	40 x 40		
PEGACS 40A	40 x 40		
PEGAC 50A	50 x 50		
PEGACS 50A	50 x 50		

For items without adhesive, write the item without the last A.  
E.g.: PEGAC 40


PEG... 40A / 50A on demand with thickness 12/10.  
Quantity, timing and prices to be agreed.

# PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make PROEDGE OT a much sought-after profile that allows an elegant workmanlike application.

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

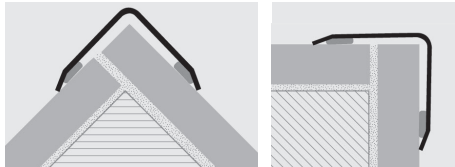

1. Choose "PROEDGE OT" according to the desired finish and width.
2. Cut "PROEDGE OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

## COLOURS



POLISHED AND CHROMED BRASS  
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm		
PEGOL 10	10 x 10		
PEGOC 10	10 x 10		

POLISHED AND CHROMED BRASS WITH ADHESIVE  
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm		
PEGOL 15A	15 x 15		
PEGOC 15A	15 x 15		
PEGOL 20A	20 x 20		
PEGOC 20A	20 x 20		
PEGOL 25A	25 x 25		
PEGOC 25A	25 x 25		
PEGOL 30A	30 x 30		
PEGOC 30A	30 x 30		

For items without adhesive, write the item without the last A.  
E.g.: PEGOL 15



POLISHED BRASS WITH ADHESIVE  
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm		
PEGOL 25A	25 x 25		
PEGOL 30A	30 x 30		

POLISHED BRASS WITH ADHESIVE  
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm		
PEGOL 40A	40 x 40		
PEGOL 50A	50 x 50		

PEG... 40A / 50A on demand with thickness 12/10.  
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.  
E.g.: PEGOL 40

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed