

**PRINTER AC 316** is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PRINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

# PRINTER AC

POLISHED AND BRUSHED STAINLESS STEEL  
AISI 316/1.4401-V4A



**POLISHED STAINLESS STEEL AISI 316/1.4404-V4A**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm
PIACM 08	8
PIACM 10	10
PIACM 125	12,5



**BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm
PIACMS 08	8
PIACMS 10	10
PIACMS 125	12,5

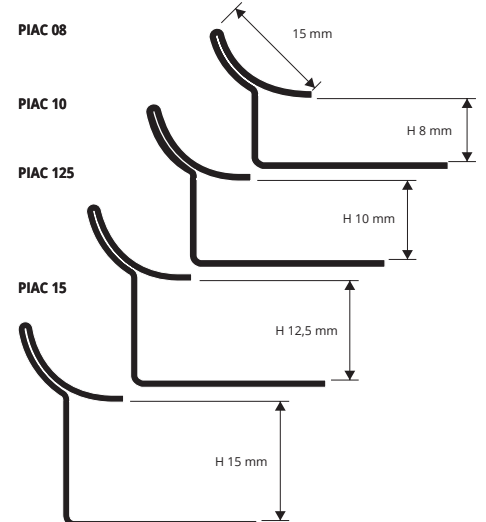

### COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

Corners of the on demand profiles are also on demand \*

JOINTS CAN ALSO BE USED FOR PRINTER KL ACC



### PRINTER JUNCTIONS

Polished stainless steel AISI 316/1.4404-V4A


Article
⊕ RIPISACM/10
⊕ RITPISACM/10
⊕ REPISACM/10
⊕ GPISACM/10
⊕ TPISACM/10

### PRINTER JUNCTIONS

Brushed stainless steel AISI 316/1.4404-V4A

Article
⊕ RIPISACMS/10
⊕ RITPISACMS/10
⊕ REPISACMS/10
⊕ GPISACMS/10
⊕ TPISACMS/10

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

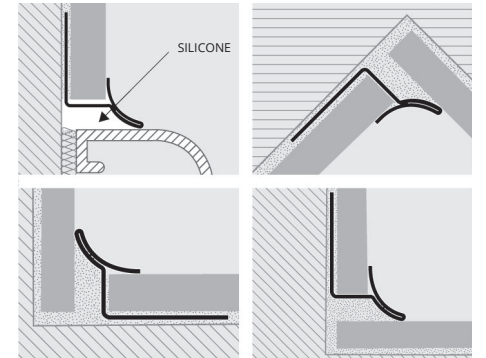

1. Choose "PRINTER AC 316" according to the tile thickness and desired finish.
2. Cut "PRINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PRINTER AC 316" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

**PRINTER KL ACC 316** is a cove-shaped profile in stainless steel AISI 316/1.4404-V4A. The profile allows to connect the floor and wall coverings in ceramic and mosaic also with low thickness. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where good resistance to mechanical and chemical stresses are required. Its particular section makes **PROSHELL KL ALL 316** a much sought after profile.

# PRINTER KL ACC

STAINLESS STEEL AISI 316/1.4401-V4A



**POLISHED STAINLESS STEEL AISI 316/1.4404-V4A**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm
PIKLACM 15	15



**BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm
PIKLACMS 15	15


### COLOURS



IT IS POSSIBLE TO USE THE JOINTS OF PRINTER AC

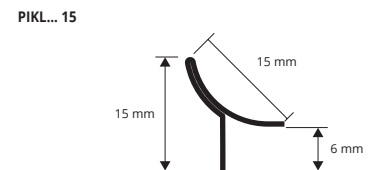

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

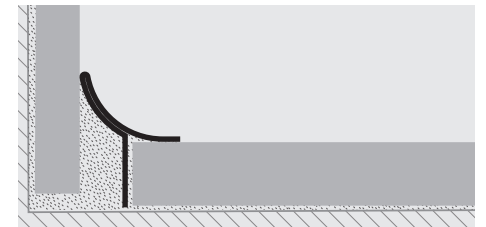

1. Choose "PRINTER KL ACC 316" according to the desired finish.
2. Cut "PRINTER KL ACC 316" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PRINTER KL ACC 316" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS