


PROSHELL ALL

ANODIZED, POLISHED AND VARNISHED ALUMINIUM

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make PROSHELL ALL a much sought-after profile that allows a workmanlike application.

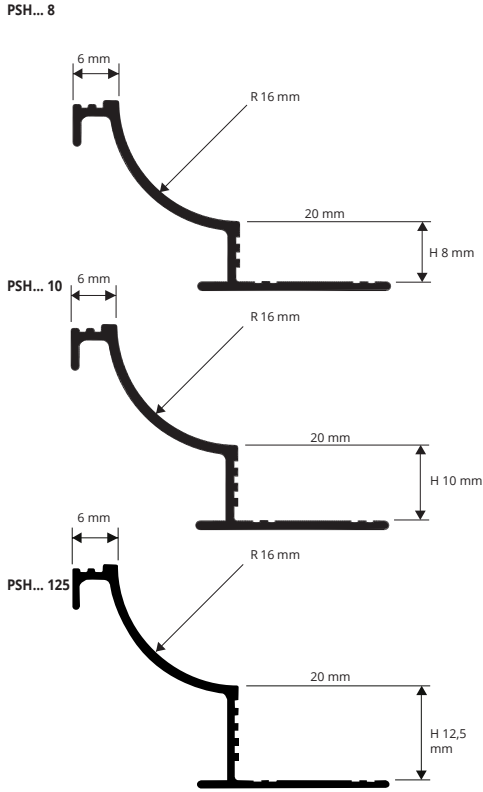

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE NEXT PIC):
 Use proterminal PT 08 to reach H 10 mm
 Use proterminal PT 10 to reach H12,5 mm
 Use proterminal PT 12,5 to reach H 15 mm



ANODIZED SILVER ALUMINIUM thermo packed
 bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | | |
|-----------|------|--|--|
| PSHAA 08 | 8 | | |
| PSHAA 10 | 10 | | |
| PSHAA 125 | 12,5 | | |

VARNISHED WHITE ALUMINIUM thermo packed
 bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | | |
|-------------|------|--|--|
| PSHA 08-01 | 8 | | |
| PSHA 10-01 | 10 | | |
| PSHA 125-01 | 12,5 | | |




POLISHED CHROME ALUMINIUM thermo packed
 bar length 2,7 lm - pack. 20 Pcs - 54 lm

| Article | H mm | | |
|-----------|------|--|--|
| PSHBC 08 | 8 | | |
| PSHBC 10 | 10 | | |
| PSHBC 125 | 12,5 | | |

COLOURS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

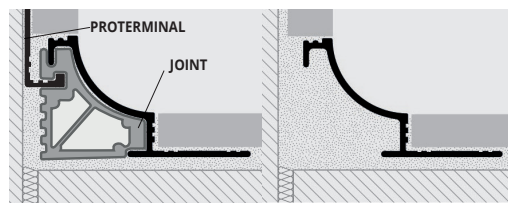

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. 2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL ALL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

CORNERS, END CAPS and JOINTS

SILVER ANODIZED, POLISHED CHROME AND VARNISHED WHITE ALUMINIUM / PLASTIC



EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM

| Article | H mm | | |
|-----------------|-----------|--|--|
| RPSHIAA .../... | 08/10/125 | | |
| RPSHEAA .../... | 08/10/125 | | |

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

| Article | H mm | | |
|-----------------|-----------|--|--|
| RPSHIBC .../... | 08/10/125 | | |
| RPSHEBC .../... | 08/10/125 | | |

EXTERNAL/INTERNAL CORNER VARNISHED WHITE ALUMINIUM

| Article | H mm | | |
|-------------------|-----------|--|--|
| RPSHIA ...-01/... | 08/10/125 | | |
| RPSHEA ...-01/... | 08/10/125 | | |

CAPS - ANODIZED SILVER ALUMINIUM/POLISHED CHROME/VARNISHED WHITE ALUM.

pack. 10 Pcs (5 right and 5 left) - pack. 2 Pcs (1 right and 1 left)

| Article | H mm | | |
|----------------|------|--|--|
| TPSHAA 08/... | 8 | | |
| TPSHBC 08/... | 8 | | |
| TPSHA 08/... | 8 | | |
| TPSHAA 10/... | 10 | | |
| TPSHBC 10/... | 10 | | |
| TPSHA 10/... | 10 | | |
| TPSHAA 125/... | 12,5 | | |
| TPSHBC 125/... | 12,5 | | |
| TPSHA 125/... | 12,5 | | |

JOINTS IN RIGID GREY PLASTIC - pack. 10 Pcs

| Article | H mm | | |
|---------------|------|--|--|
| GISHN 08/... | 8 | | |
| GISHN 10/... | 10 | | |
| GISHN 125/... | 12,5 | | |

INTERNAL CORNER
RPSHI.../...



EXTERNAL CORNER
RPSHE.../...



END CAP
TPSH.../...



JOINT
GISHN.../...



Choose the desired packaging. E.g.: TPSH...-01/5 (Pack 10 Pcs)
 TPSH...-01/1 (Pack 2 Pcs)