


PROCOVER


POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROCOVER is a joint-cover profile in stainless steel (polished or brushed) with aluminium supports. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive. The aluminium structure with the stainless steel lining provides it with a high level of resistance to cuts and deformation.


threshold - joint-cover profiles

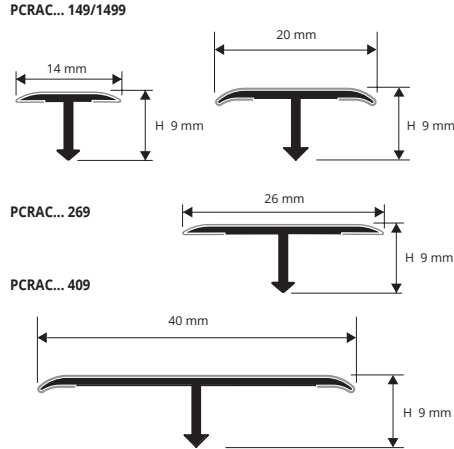

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

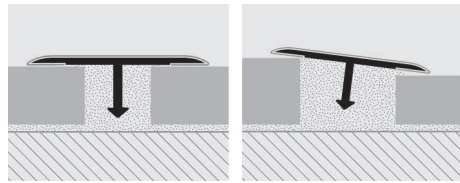

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

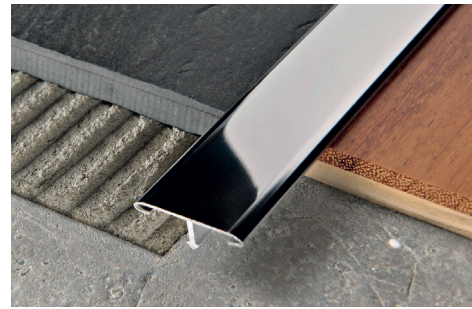

POLISHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm



Article	Pcs/Pack	L x H mm
PCRAC 149	40	14 X 9
PCRAC 209	40	20 X 9
PCRAC 269	30	26 X 9
PCRAC 409	20	40 X 9

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A
with protective film - bar length 2,7 lm - 4/10 mm



Article	Pcs/Pack	L x H mm
PCRACS 149	40	14 X 9
PCRACS 209	40	20 X 9
PCRACS 269	30	26 X 9
PCRACS 409	20	40 X 9

bar length 0,90 lm


Article	Pcs/Pack	L x H mm
PCRAC 1499	20	14 X 9
PCRACS 1499	20	14 X 9

PROCOVER


POLISHED, CHROMED AND ANTIQUE BRASS

PROCOVER is a joint-cover profile in polished, chromed and antique brass. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.

threshold - joint-cover profiles

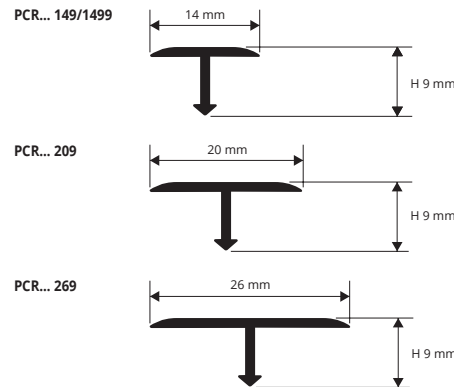

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

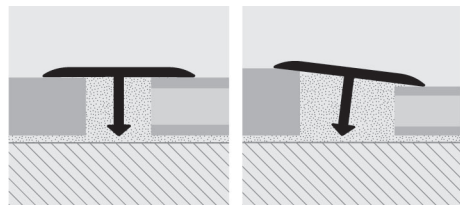

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined. Profiles in natural or polished brass may be subject to oxidation in environments with high degrees of humidity. Resulting marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



POLISHED BRASS thermo packed - bar length 2,7 lm



Article	Pcs/Pack	L x H mm
PCROL 149	20	14 X 9
PCROL 209	20	20 X 9
PCROL 269	20	26 X 9

bar length 0,90 lm - pack. 40 Pcs

Article	Pcs/Pack	L x H mm
PCROL 1499	40	14 X 9

CHROMED BRASS (polished stainless st. effect) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PCROC 149	14 X 9
PCROC 209	20 X 9
PCROC 269	26 X 9



ANTIQUÉ BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L x H mm
PCROB 149	14 X 9
PCROB 209	20 X 9
PCROB 269	26 X 9

BRUSHED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PCROS 149	14 X 9
PCROS 209	20 X 9
PCROS 269	26 X 9

COLOURS

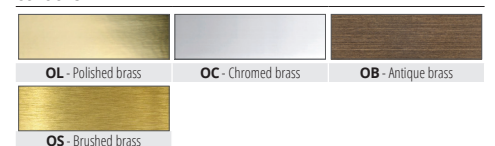

News 2024

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed