



# ADHESIVE-LAID JOINTS

CO-EXTRUDED VINYL RESIN

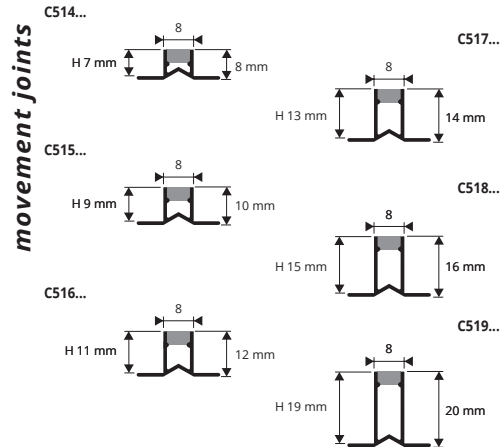


## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

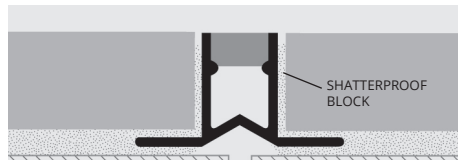

1. Choose the joint in accordance with the colour and thickness of the floor, calculating 0.5-1 mm less for laying the joint, which under no circumstances must protrude. 2. Place the joint over the cut/joint in the screed; if there is none, make a cut of 2/3 the thickness of the screed. 3. Apply the adhesive and lay the joint, pressing it into the glue. 4. Lay the tiles, aligning them with the rigid vertical part of the joint. 5. Using the special glue, fill the gap between the tiles and the profile.

**ADHESIVE-LAID MOVEMENT JOINTS** are a range of joints in co-extruded vinyl resin with the flanges and vertical supports made in rigid synthetic vinyl resin and the elastic central part in flexible synthetic vinyl resin. The glue-laid joints must be placed at least 0.5-1 mm below the level of the flooring (usually tiles) and never above. Suitable for pedestrian traffic, they absorb compressive and slip stress. Laying modules between 16 and 30 m<sup>3</sup> inclusive are recommended and the joint laid in line with the joints in the underlying screed. Available in various colours and heights. Lay the joints according with the standards in force.

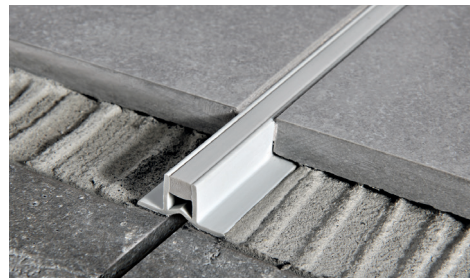


**CO-EXTRUDED VINYL RESIN**  
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm
C514... (8x8)	7
C515... (10x8)	9
C516... (12x8)	11
C517... (14x8)	13
C518... (16x8)	15
C519... (20x8)	19

### ARTICLES NOT FOR SALE SINGLY

Available combinations: GS-GT-GL (RT-MT-BI-BI-B-A and N available on demand with a minimum quantity order of 400 pcs). The code of the selected colour must be added to the article code. E.g.: C514... (combination chosen colour Dark Grey / Transparent)



On demand (at same price) also available **WITHOUT FLAP** with a minimum order of 200 pcs. **N.B.:** specify "WITHOUT FLAP" in order.

### COLOURS

GS - Dark grey for rigid and flexible part	GT - Dark grey for rigid part / Transparent for flexible part	GL - Light grey for rigid and flexible part
--	---	---

**ON DEMAND - MINIMUM QUANTITY 400 PCS** for colour and height


RT - Red for rigid part / Transparent for flexible part	MT - Brown for rigid part / Transparent for flexible part	BI/BI - White for rigid and flexible part
B/B - Beige (E84)	A/A - Ivory (E81)	N/N - Black for rigid and flexible part

(Price to be agreed. Production delay 4/5 weeks)


# MORTAR-LAID JOINTS

POLISHED BRASS - STAINLESS STEEL AISI304/1.4301-V2A  
NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM

The **MOVEMENT JOINT** has been specially created to relieve the stress in prestige floors (marble, granite, ceramic tiles or wood) laid on a mortar bed. The joint is simply inserted by hand and is levelled with a plastic hammer. It is available in brass and stainless steel with internal vulcanised expanded EPDM gasket. Strong, practical and top quality. Lay the joints according with the standards in force.

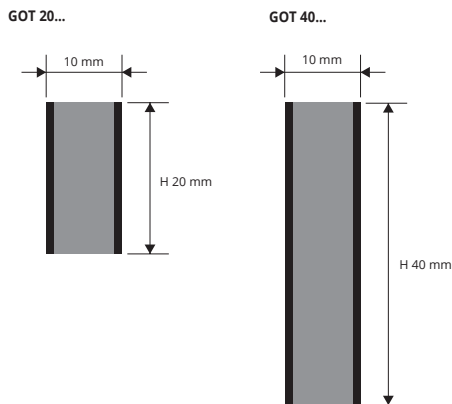

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

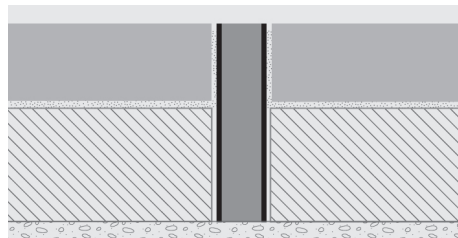

1. Choose the colour and the necessary height of the joint, calculating the thickness of the finished floor and the thickness of the screed. 2. Insert the joint into the screed letting it protrude slightly. 3. Proceed with laying the floor, aligning it with the rigid vertical part of the joint. 4. Complete laying by levelling the joint with the floor. 5. Using the mortar, grout the gap between the tiles and the profile.



**POLISHED BRASS WITH SANDABLE VULCANIZED EPDM**  
bar length 2 lm - pack. 25 Pcs - 50 lm (GOT 40... - 20 lm)

Article	L x H mm
GOT 20...	10 X 20
GOT 40...	10 X 40

### COLOURS

OL - Polished Brass	AC - Polished Stainless Steel AISI 304/1.4301-V2A	AN - Natural aluminium
---------------------	---	------------------------

### COLOURS (EPDM)

N - Black	G - Grey
-----------	----------

**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A WITH SANDABLE VULCANIZED EPDM**  
bar length 2 lm - pack. 25 Pcs - 50 lm (GAC 40... - 20 lm)

Article	L x H mm
GAC 20...	10 X 20
GAC 40...	10 X 40

**SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS**

**NATURAL ALUMINIUM WITH SANDABLE VULCANIZED EPDM**  
bar length 2 lm - pack. 25 Pcs - 50 lm (GAL 40... - 40 lm)

Article	L x H mm
GAL 20...	10 X 20
GAL 40...	10 X 40

Insert available in the colours: G - N. The code of the selected finish must be added to the article code. E.g.: GAC 20... (chosen insert colour grey) GAC 20G.

\* = Production on demand with minimum quantity of 500 pcs. Production delay 4/5 weeks. Price to be agreed