
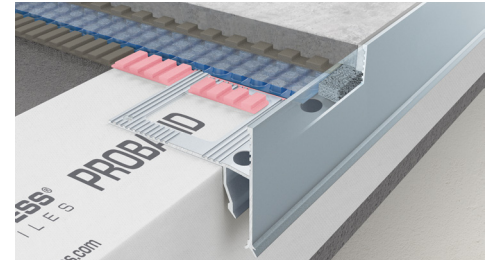
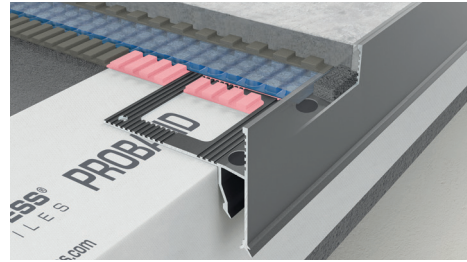


PROTERRACE DOUBLE DRIP

VARNISHED ALUMINIUM

PROTERRACE DOUBLE DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. The double drip allows the drainage water to flow out in case of application with PRODES0 DRAIN draining membrane. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

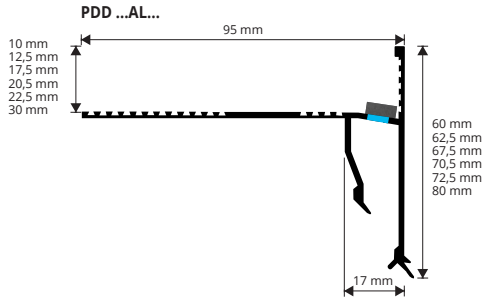

VARNISHED/COATED ALUMINIUM
bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm
⊕ PDD 10AL...	10
⊕ PDD 125AL...	12,5
⊕ PDD 175AL...	17,5
⊕ PDD 205AL...	20,5
⊕ PDD 225AL...	22,5
⊕ PDD 30AL...	30

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PDD 175AL... (white) PDD 175ALBF.

JOINTS - pack. 10 Pcs

Article	H mm
⊕ GINPDD 10AL...	10
⊕ GINPDD 125AL...	12,5
⊕ GINPDD 175AL...	17,5
⊕ GINPDD 205AL...	20,5
⊕ GINPDD 225AL...	22,5
⊕ GIPDD 30AL...	30


EXTERNAL CORNERS - pack. 10 Pcs

Article	H mm
⊕ AEPDD 10AL.../10	10
⊕ AEPDD 125AL.../10	12,5
⊕ AEPDD 175AL.../10	17,5
⊕ AEPDD 205AL.../10	20,5
⊕ AEPDD 225AL.../10	22,5
⊕ AEPDD 30AL.../10	30

INTERNAL CORNERS - pack. 10 Pcs

Article	H mm
⊕ AIPDD 10AL.../10	10
⊕ AIPDD 125AL.../10	12,5
⊕ AIPDD 175AL.../10	17,5
⊕ AIPDD 205AL.../10	20,5
⊕ AIPDD 225AL.../10	22,5
⊕ AIPDD 30AL.../10	30

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

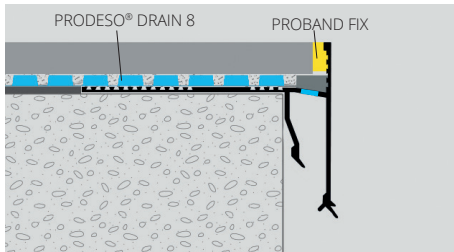


1. Choose PROTERRACE DOUBLE DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DOUBLE DRIP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with **PROBAND FIX**.

HOW TO REQUEST SEASIDE TREATMENT


When placing your order please add S to the article's number
Example: PDD 175ALGF (seaside) = **PDD 175ALGFS**




GINPDD ...AL...



AEPDD ...




AIPDD ...

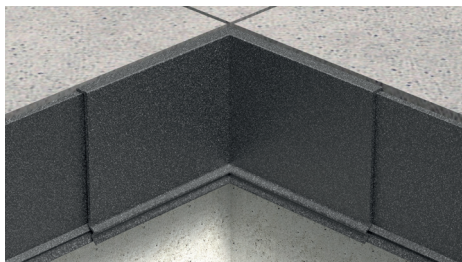

INTERNAL ANGULAR JUNCTION

Article
⊕ AICPDD 10AL...
⊕ AICPDD 125AL...
⊕ AICPDD 175AL...
⊕ AICPDD 205AL...
⊕ AICPDD 225AL...
⊕ AICPDD 30AL...

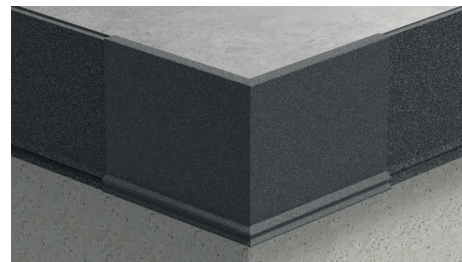

EXTERNAL ANGULAR JUNCTION


Article
⊕ AECPDD 10AL...
⊕ AECPDD 125AL...
⊕ AECPDD 175AL...
⊕ AECPDD 205AL...
⊕ AECPDD 225AL...
⊕ AECPDD 30AL...



END CAP

Article	Pcs/Pack
⊕ TPDD AL.../2	2

The code of the selected colour must be added to the article code. E.g.: TPDD AL... (white) TPDD ALBF



EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)
-------------------	------------------	------------------------------	------------------------

COLOURS ON DEMAND

EMBOSSED		SEMIGLOSSY			
EF - Beige (1019)	C - Corten	B - White (9010)	G - Grey (7038)	E - Beige (1019)	T - Dark brown (8019)

STONE LINE - COLOURS ON DEMAND

SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greivory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragra	SL08 - Stone antradark	SL09 - Stone bronze	SL12 - Stone black
SL13 - Stone oyster grey	SL14 - Stone taupe grey	SL15 - Stone grey smoke	SL16 - Stone grey gun	SL17 - Stone tobacco	SL18 - Stone white cement				