
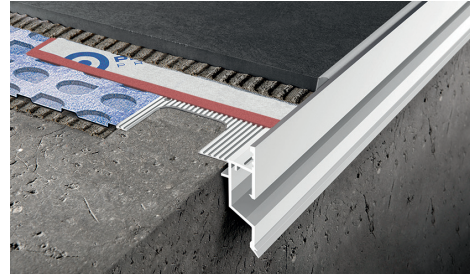


PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM
While stocks last.

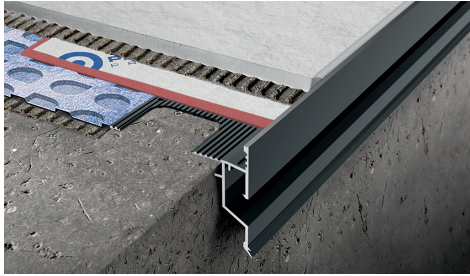

VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm

Article	H mm
PFDPP 10AL...	10
PFDPP 125AL...	12,5

Available in the colours: BF - GF - A - TF (EF - C - B - G - E - T on demand). The code of the selected colour must be added to the article code. E.g.: PFDPP 10 AL... (white) PFDPP 10 ALBF.

END CAPS - Pack. 2 PCS

Article
TPFDPP AL.../2




JOINTS - pack. 1 upper + 1 lower

Article
GINFDPP 10AL .../1
GINFDPP 125AL .../1




EXTERNAL CORNERS - pack. 10 Pcs

Article
AEPFDPP 10AL.../10
AEPFDPP 125AL.../10



INTERNAL CORNERS - pack. 10 Pcs


Article
AIPFDPP 10AL.../10
AIPFDPP 125AL.../10




HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number
Example: PFDPP 10ALGF (seaside) = **PFDPP 10ALGFS**

PFDPP ... AL...

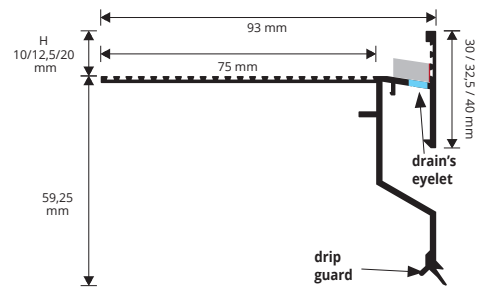

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

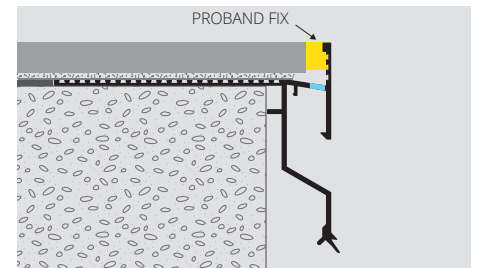

1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour.
2. Fix the external corners to the screed (at least 1 cm from it) with nails.
3. Fix the draining adhesive stripe in polyurethane on the vertical side of the profile.
4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate.
5. Lay the desired waterproofing system.
6. Lay the tiles leaving at 5 mm between the tile and the profile.
7. Seal the space between tile and profile with **PROBAND FIX (P.186)**.

EMBOSSED COLOURS

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)	TF - Dark brown (8019)

