


# PROSKIRTING

ANODIZED SILVER ALUMINIUM

**PROSKIRTING** is an innovative patented "cable channel" skirting in anodized aluminium. Studied and designed to resolve various problems related to the installation of skirting and to the laying of electrical, computer and telephone cables and other service systems. **PROSKIRTING** has been designed to offer a dual function: 1- **PROSKIRTING** complete PKAA 80 is a snap-on inspectable skirting consisting of a support PKGS 66 to be screwed to the wall and the visible profile **PROSKIRTING** PKAA 80. 2- **PROSKIRTING** PKAA 80 is the visible skirting profile to be fixed directly with silicone/adhesive. It is not inspectable like **PROSKIRTING** complete; it is also available in a self-adhesive version (PKAA 80A).

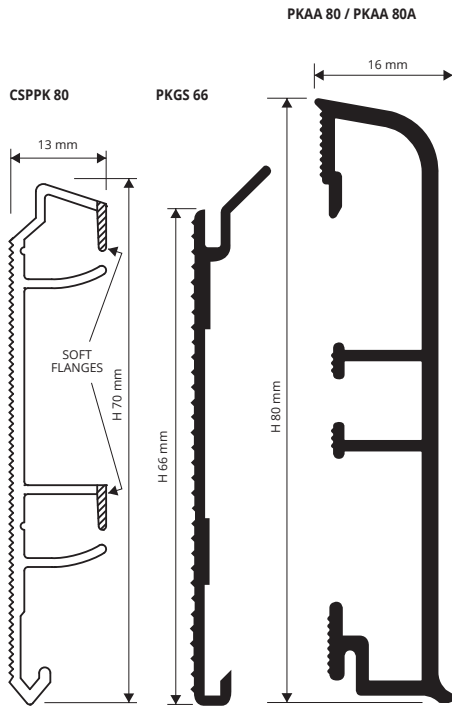

**ONLY SKIRTING (for sale singly) - ANODIZED SILVER ALUMINIUM thermo packed - bar length 2 lm - pack. 10 Pcs - 20 lm**

| Article  | H mm |
|----------|------|
| PKAA 80  | 80   |
| PKAA 80A | 80   |

"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




**CABLE RACEWAY/ SUPPORT- COEXTRUDED PVC bar length 2 lm - pack. 20 Pcs - 40 lm**

| Article  | H mm |
|----------|------|
| CSPPK 80 |      |


**PUNCHED SUPPORT - NATURAL ALUMINIUM support length 2 cm - pack. 10 Pcs**

| Article | H mm |
|---------|------|
| PKGS 66 | 66   |

ARTICLES NOT FOR SALE SINGLY



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

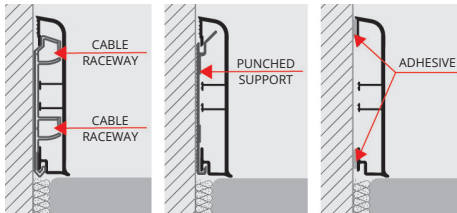

1. Choose the system with or without support 2. Fix the support to the wall with screws and screw anchors at 50 cm intervals (recommended). 3. When laying without support, thoroughly clean the surface ensuring that it is grease-free and dry, apply the silicone on the knurled sides of the profiles and lay correctly by applying pressure evenly over the whole profile without using a hammer. 4. For the "PROSKIRTING" with adhesive, application is recommended at a temperature of at least 15°. Always use the inside/outside corner linking elements and end caps for impeccable, faultless laying.


**Advantages:** profile to be glued. Aesthetically superior thanks to the HI-TECH design with rounded shell-shape top and bottom edges that are easy to clean. PROSKIRTING is made in anodized aluminium with silver finish; the anodizing layer is approx. 15/20 micron. Recommended for indoor and outdoor use thanks to its good anti-oxidation properties.

- Single visible skirting profile, which may be inspectable or fixed.
- Minimum stock investment with just 2 products for three functions.
- Easy to install and clean.
- Patented innovative HI-TECH design.
- Inside-outside corners-end caps and joints varnished in the same finish as the profile.
- The PROSKIRTING profile is antistatic and stops electromagnetic and electrostatic discharge.

## COLOURS



AA - Anodized silver alum.




**POWER SUPPLY BOX**  
SOCKET with FASTENING BASIS

| Article  | H mm |
|----------|------|
| SPA 1820 |      |

**SWITCH BOX**  
with BOX BASIS

| Article | H mm |
|---------|------|
| SI 1410 |      |



**JUNCTION BOX**  
with FASTENING BASIS

| Article | H mm |
|---------|------|
| SD 1210 |      |

**VERTICAL CABLE DUCT PROFILE**  
bar length 2,7 lm

| Article | H mm |
|---------|------|
| PSPV    |      |

It matches with CSPPK 80

# CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC SILVER FINISH.

**IN/EXTERNAL CORNER - VARNISHED PLASTIC (silver finish.)**  
pack. 5 Pcs

| Article    | H x L mm |
|------------|----------|
| PKAGI 80/5 | 80 x 40  |
| PKAGE 80/5 | 80 x 40  |

**JOINTS - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs**

| Article     | H mm |
|-------------|------|
| PKGIN 80/10 | 80   |

**END CAPS R / L - VARNISHED PLASTIC (silver finish.)**  
pack. 10 Pcs (5 right and 5 left)

| Article      | H mm |
|--------------|------|
| PKTDSAA 80/5 | 80   |




PKAGI 80  
internal corner



PKAGE 80  
external corner



PKGIN 80  
JOINT



PKTDSAA 80/5  
end caps

