

PROSKIRTING 40 is an anodized silver aluminium skirting profile, with a height of 40 mm. It can be fixed directly to the wall with adhesive (non-inspectionable adhesive version PKAA 40A) or to a support (inspectionable version PKAA 40) in punched aluminium, pieces 20 mm long to be fixed to the wall with screws, every about 50 cm.

PROSKIRTING 40

ANODIZED SILVER ALUMINIUM



SKIRTING - SILVER ANODIZED ALUMINIUM thermo packed
bar length 2 lm - pack. 20 Pcs - 40 ml

Article	H mm
PKAA 40	40
PKAA 40A	40

"A" at the end of the product code = Item with adhesive

PUNCHED SUPPORT - NATURAL ALUMINIUM


support length 2 cm - pack. 10 Pcs

Article	H mm	It matches with PKAA 40
PKGS 37	37	

COLOURS



AA - Anodized silver alum.

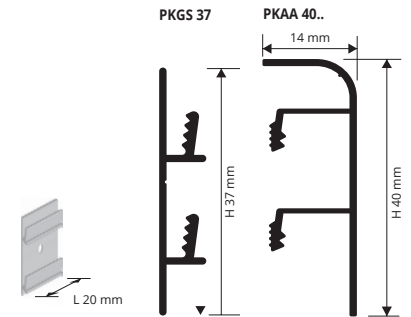

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

IN/EXTERNAL CORNERS - VARNISHED PLASTIC (silver finish.)

pack. 5 Pcs

Article	H mm
PKAGI 40/5	40
PKAGE 40/5	40

JOINTS - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs

Article	H mm
PKGIN 40/10	40

END CAPS R / L - VARNISHED PLASTIC (silver finish.) - pack. 10 Pcs (5 right and 5 left)

Article	H mm
PKTDSAA 40/5	40



PKAGI 40
internal corner



PKAGE 40
external corner

PKGIN 40
joint



PKTDSAA 40/5
end caps
R

PROSKIRTING SHELL is an innovative aluminum skirting board, with 70mm height, in silver anodized finish. The skirting board can be fixed to the wall with silicone or screwed to 20mm long aluminum punched flanges, that have to be fastened to the wall at 50cm distance from each other. It allows to cover up to 25mm high perimeter edges. Moreover the version with punched flanges allows the housing of low tension electrical cables, such as internet, phone, TV and satellite cables and can be easily inspected. The optional completing pieces, such as inside/outside corners, linking elements and end caps make **PROSKIRTING SHELL** easy to install and guarantee a practical and elegant end result.

PROSKIRTING SHELL

ANODIZED SILVER ALUMINIUM



SKIRTING - ANODIZED SILVER ALUMINIUM thermo packed

bar length 2 lm - pack. 25 Pcs - 50 lm

Article	H mm
PKSHAA 70	70
PKSHAA 70A	70


"A" at the end of the product code = Item with adhesive

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



(PAGE 324)

COLOURS



AA - Anodized silver alum.




PUNCHED SUPPORT - NATURAL ALUMINIUM

support length 2 cm - pack. 10 Pcs


Article	H mm
PKGS 55	55

ARTICLES NOT FOR SALE SINGLY

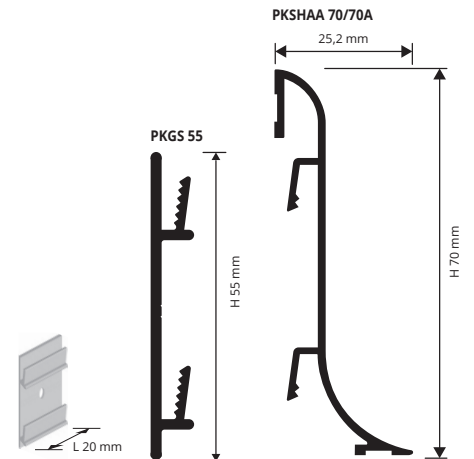

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the right version of "PROSKIRTING SHELL" depending on the desired fixing solution; 2. If you want to build low tension electrical cables (e.g. internet, phone, TV and satellite cables) into the profile, fasten the punched flanges to the wall using dowels at 50cm distance from each other; 3. Install electrical wiring and fasten "PROSKIRTING SHELL" to the flanges; 4. If you are installing the version with adhesive, first clean and the surface where the profile will be installed, then apply the silicone once the surface is dry. Remove the protective film and lay the profile, applying adequate pressure on it.

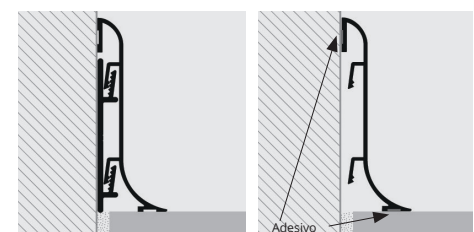

CORNERS, END CAPS and JOINTS

VARNISHED PLASTIC (SILVER FINISH)

EDGE COVER CORNERS

IN/EXTERNAL CORNER - EDGE COVER

VARNISHED PLASTIC (silver finish.) - pack. 5 Pcs

Article	H x L mm
RIPKSHAA 70/5	70 x 20
REPKSHAA 70/5	70 x 20

JOINT - EDGE COVER - VARNISHED PLASTIC (silver finish.)

pack. 5 Pcs

Article	H mm
GIPKSHAA 70/5	70

END CAPS R / L - EDGE COVER

VARNISHED PLASTIC (silver finish.) - pack. 6 Pcs (3 right and 3 left)

Article	H mm
TPKSHAA 70/3	70

EXTERNAL CORNER
REPKSHAA 70



INTERNAL CORNER
RIPKSHAA 70



JOINT
GIPKSHAA 70



END CAPS
TPKSHAA 70

