


STYLE STAIR

TOP IN WOODEN FINISHES
and ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

stair nosing profiles

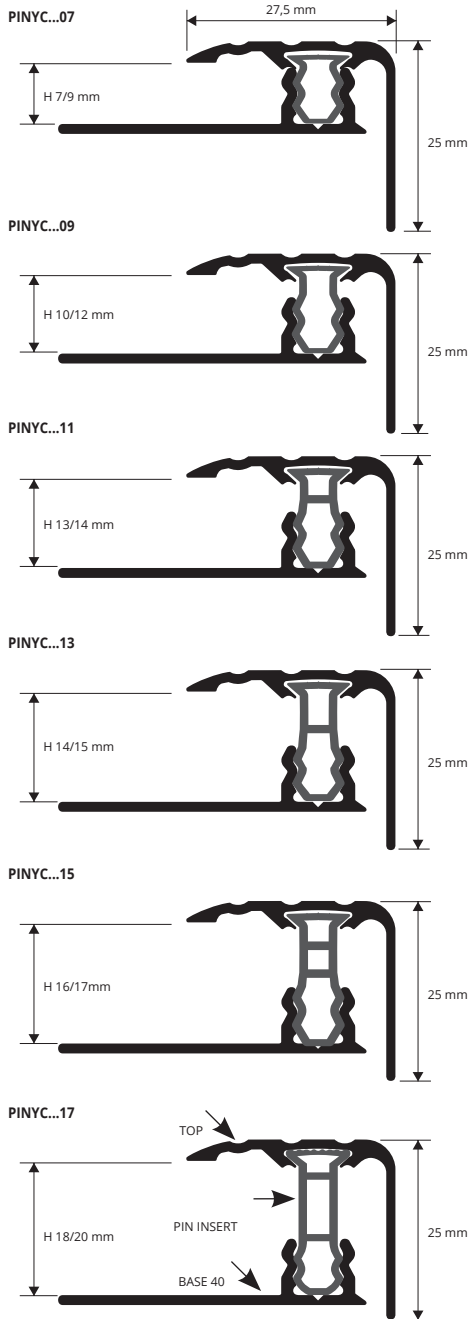

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (6 anod. alum. finishes of which 3 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYC... 07 (PIN 07)	7 / 9
PINYC... 09 (PIN 09)	10 / 12
PINYC... 11 (PIN 11)	13 / 14
PINYC... 13 (PIN 13)	14 / 15
PINYC... 15 (PIN 15)	16 / 17
PINYC... 17 (PIN 17)	18 / 20

COMPLETE




ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED (80 wooden finishes of which 60 on demand) thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm
PINYC... 07 (PIN 07)	7 / 9
PINYC... 09 (PIN 09)	10 / 12
PINYC... 11 (PIN 11)	13 / 14
PINYC... 13 (PIN 13)	14 / 15
PINYC... 15 (PIN 15)	16 / 17
PINYC... 17 (PIN 17)	18 / 20


COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND



On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.