



# PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded fin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.

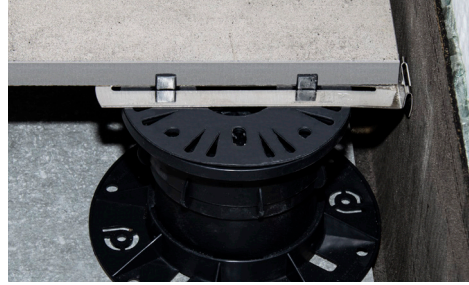

**PERIMETER SPACER PROSUPPORT SYSTEM**  
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs

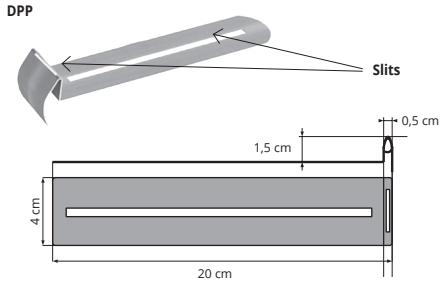

Article		
DPP		

# PROSUPPORT TUBE SYSTEM OPTIONAL

**ADJUSTING KEY (only for head PSTH 04)**

Article		
PSTAK		



**ADJUSTABLE SPACER TABS 4 mm**  
polypropylene - Pack 80 pcs

Article	L x H mm	Pcs/pack
PSTJ	80 x 20	80

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

**FIXING CLIP FOR TILES - WIND-PROOF**  
Pack 40 pairs

Article	L x H mm	Pcs/pack
PSTWP	20 x 60	40

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

**RUBBER DISK for laying on bituminous roof membrane**  
H 2 mm - Pack. 100 Pcs (box 100 pcs)

Article	H (mm)
LVGG 02	2

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



**SPACER FOR APPLICATION ON GRAVEL**  
Pack. 100 Pcs (box 100 pcs)

Article		
DILV		


Transparent plastic 4 mm cross spacer for laying on gravel or irregular surfaces.



**PROSUPPORT SUB-BASE**

Article	Pc/Pack
PSTPG 2020	160

Recycled rubber plate, 20 x 20 cm 3 mm thick, to protect the bituminous sheath for laying Prosupport.



# KIT PROSUPPORT TUBE

The kits contain all the necessary components: Base, Screw, Head 4 mm and anti-noise and anti-slip rubber. A first kit of variable height from 34 mm to 54 mm and a second kit of variable height from 54 mm to 74 mm. The kits are compatible with all accessories of the PROSUPPORT TUBE line.

**KIT PROSUPPORT TUBE**

Article	H (mm)	Pc/Pack
PSTK 3454/4	29 - 54	20
PSTK 5474/4	49 - 74	20

**Kit components**

Article	Description	Pz./Conf.
PSTK 0202/0204	BASE + SCREW 20/40 mm	20
PSTH 04	HEAD 4 mm	20
PSTG	ANTI-NOISE AND ANTI-SLIP RUBBER	20



News 2024

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed