




PROFILE WITH TRIANGULAR CHAMFER

GREY RIGID PVC

The **TRIANGULAR CHAMFER** is made in grey rigid PVC in various widths 10-15-20-30 mm and standard length of 2 lm. It is mainly used to chamfer the corners of the concrete pours when making, for example, walls-columns etc. It is strong and easy to lay.

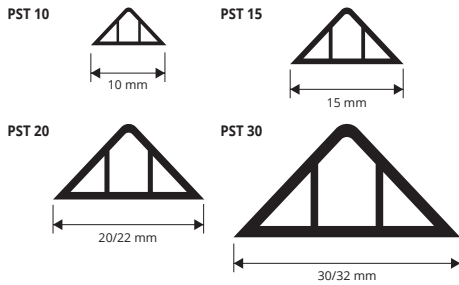

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm


Article	Width mm		
PST 10	10		
PST 15	15		

20.000 lm pallets

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm

Article	Width mm		
PST 20	20/22		
PST 30	30/32		


PST 20: 15.000 lm / pallets
PST 30: 10.000 lm / pallets

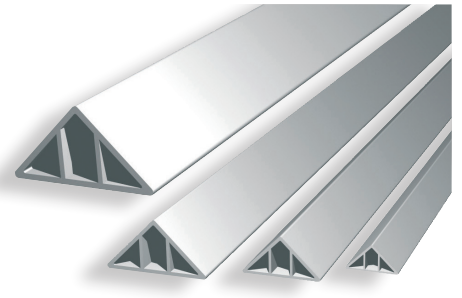

LAYING INSTRUCTIONS
Put the nails into the central part along the profile before pouring the concrete.

ROUNDED TRIANGULAR CHAMFER FILLET

GREY RIGID PVC

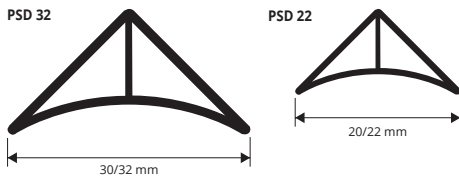

GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm


Article	L mm		
PSD 22	20/22		
PSD 32	30/32		

PSD 22: 15.000 lm / pallets
PSD 32: 10.000 lm / pallets

COLOURS



LAYING INSTRUCTIONS
Put the nails into the central part along the profile before pouring the concrete.

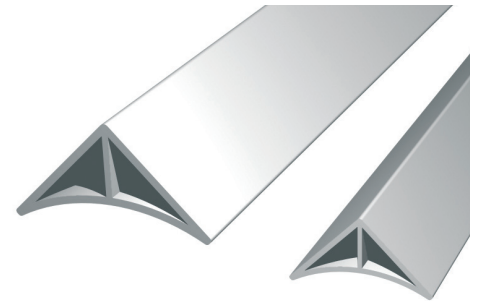

FISHBONE RIBBED JOINT

GREY RIGID PVC

COLOURS




GREY RIGID PVC
bar length 2 lm - pack. 50 Pcs - 100 lm

Article	H x L mm		
GRP 25	25 X 5		
GRP 45	45 X 5		

GRP 25: 10.000 lm / pallets
GRP 45: 5.000 lm / pallets

LAYING INSTRUCTIONS
Laying is very simple: just insert the ribbed joint into the gap deliberately left in the concrete or the screed.

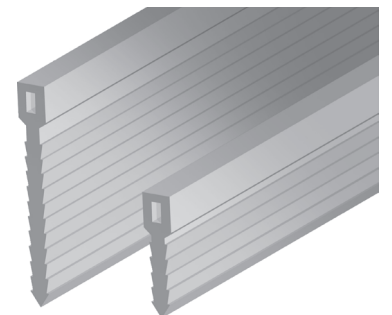

PROFILE WITH DOUBLE CHAMFER - FOR BALCONIES

GREY RIGID PVC

COLOURS




GREY RIGID PVC
on demand bar length

Article	H mm		
R 117	80		*

PROFILE SPECIFICATIONS:

- Chamfer angle 45°
- Chamfer length 20 mm
- Bar length on demand
- Weight x metre ≈ 2,3 Kg

LAYING INSTRUCTIONS
Laying is very simple: just fix it with nails or clamps in the relative formwork prior to pouring the concrete.

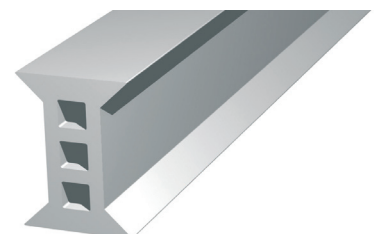

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed.