

Floor & Wall

INTERNATIONAL 2024

■ PROGRESS PROFILES / www.progressprofiles.com

RESIDENCE HOTEL AMBIEZ

Surrounded by the luxuriant landscape and the splendid Dolomites that frame Madonna di Campiglio (TN), the Residence Hotel Ambiez offers apartments in a metropolitan style, combining traditional architectural elements with a touch of modern design. It includes the Lares restaurant and a wellness area dedicated to relaxation. For the renovation of the panoramic swimming pool, the company relied on the professionalism of Progress Profiles and the quality of the Italian company's products offered by Ceramiche Beseno SRL. The indoor swimming pool was suffering from waterproofing problems that were causing cracks to appear in the adjacent flooring and some of the tiles to come loose: it needed a complete overhaul so that it could once again become the place of choice for guests after an intense hike or a long ski trip.


PROFOIL, a polyethylene membrane with a polypropylene fleece on both sides, was used to waterproof the entire pool. This membrane guarantees high adhesion and ensures perfect waterproofing in environments with high vapour tension, such as saunas and Turkish baths, but also in areas in permanent contact with pressurised water, such as swimming pools.

PRODESO MEMBRANE, ideal for all types of flooring, has been chosen to protect the edges and prevent future cracks and fissures. In fact, this innovative, patented membrane allows for the uncoupling between the substrate and the tile, meeting this need and ensuring the release of vapour tensions even in the case of overlapping on cracked and not perfectly cured substrates. Prodeso Membrane also distributes the load or heat of any heating system evenly and allows the installer to work without interruption from the laying of the membrane to the laying of the floor.

The floor was then laid over the entire surface using the PROLEVELING SYSTEM, the innovative and patented levelling system that guarantees a perfectly level floor. Consisting of just two elements, it is practical and easy to use, as it does not require the use of pliers or other tools. Available in different thicknesses, from 1 to 5 mm, it is differentiated according to the desired joints and combinations, making it easy to create an in-line or running installation.

The system also includes a tie-rod which, when inserted into the threaded stem of the levelling base, allows the installer to adjust the pressure on the surface and precisely align the joint lines of the tiles, guaranteeing perfect fixing. At the end of the installation, a light push or kick in the direction of the joint removes the tie rod, which can be reused indefinitely and is unique for all heights and models.

32

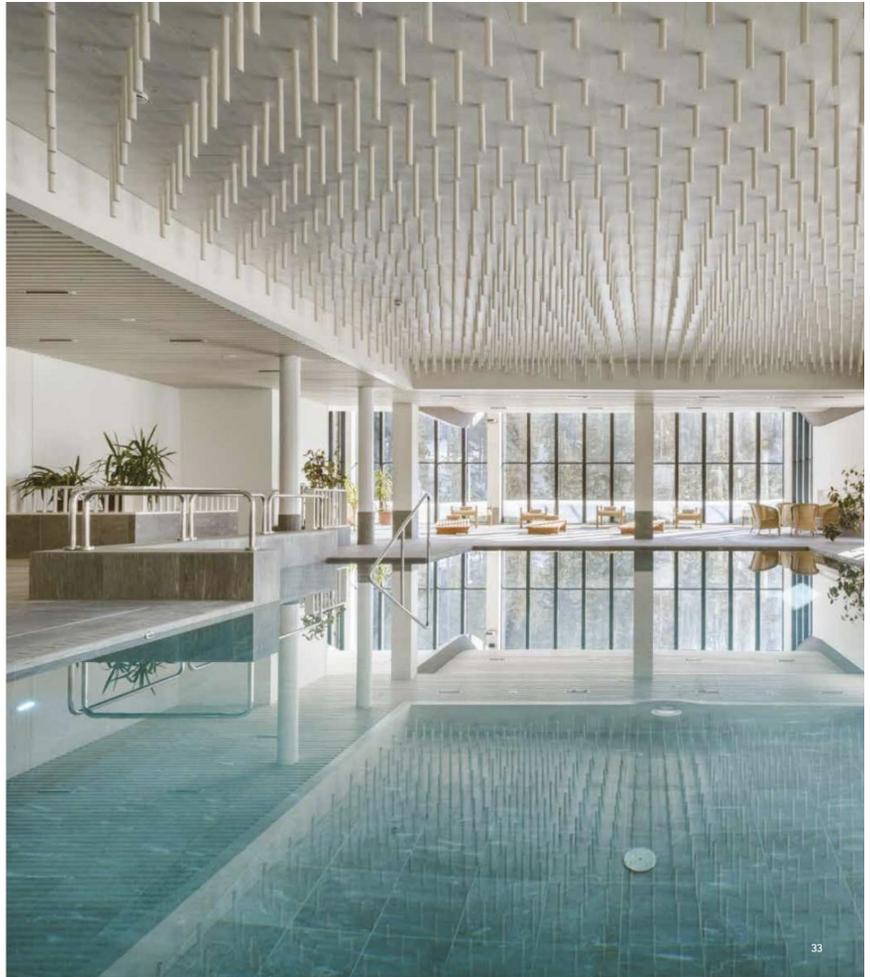

33

Testata: Floor & Wall International

Data: gennaio 2024