


The **WATERSTOPS** profiles are made in high-quality polyvinyl chloride (plasticized PVC) and have excellent physical-mechanical properties, strength, flexibility, resistance to ageing and fluid-tightness even under pressure. The "Flat Waterstop" model art. WP is used for adjacent pours of concrete, while the "Waterstop with Bulb" model art. WB is used in concrete casting but as an expansion joint, thanks to the central bulb. They find many applications: floors, underground rooms, trench ducts/underground passages, face walls, cisterns, silos, swimming pools, tanks, canals, dams, aqueducts, etc. The quality of the materials allows the waterstops to be used on concrete structures exposed to temperatures between -30°C and +70°C, also ensuring good resistance to chemicals in alkaline environments, to brackish waters and to acid solutions.

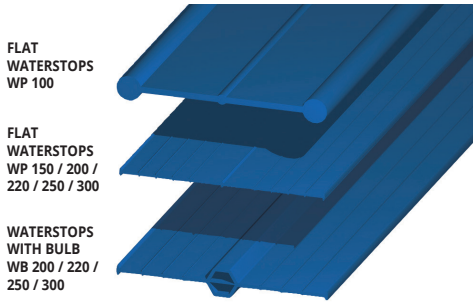

**FLAT WATERSTOPS - PLASTICIZED PVC BLUE**  
pack. rolls 25 lm (WP 150 - pack. rolls 50 lm)

Article	L mm		
WP 100	100		
WP 150 (50 ml)	150		
WP 200	200		
WP 220	220		
WP 250	250		
WP 300	300		


ANCHORING CLIPS for WATERSTOPS on demand.



**WATERSTOPS WITH BULB - PLASTICIZED PVC BLUE**  
pack. rolls 25 lm


Article	L mm		
WB 200	200		
WB 220	220		
WB 250	250		
WB 300	300		

ANCHORING CLIPS for WATERSTOPS on demand.

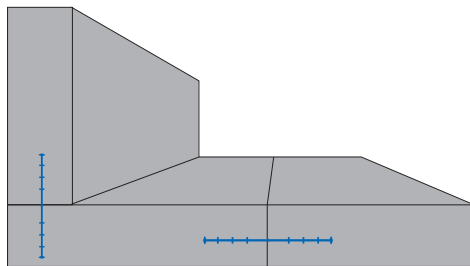


### SEALING OF WATERSTOPS

The Waterstops may be welded together to obtain a single piece of the required length. The two parts must be properly cleaned for perfect fluid-tightness of the joints. The waterstops are usually field welded using a normal hot-air heater on the ends of the sections. The bond is accomplished by melting the material and pressing one end over the other.

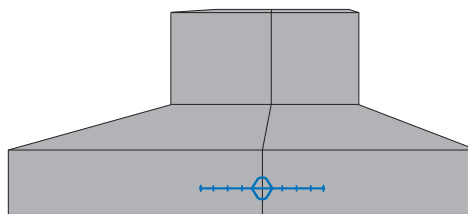

### COLOURS

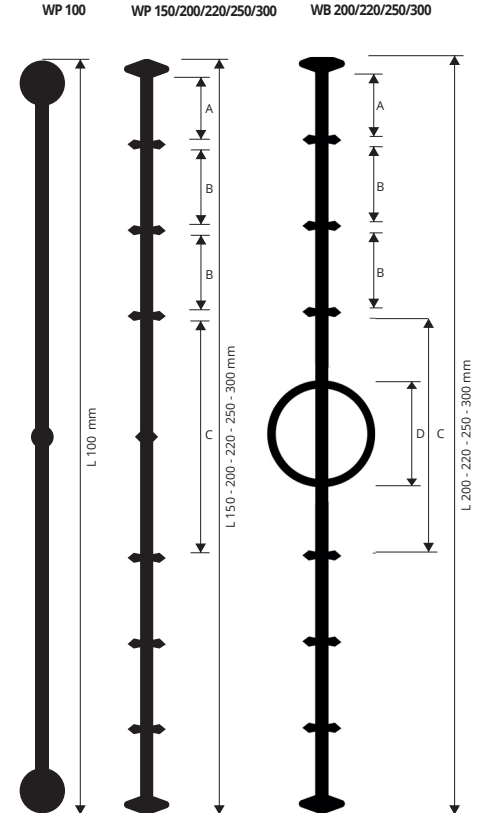

profiles for adjacent pours of concrete

### SIZE


ART.	A	B	C	D
WP 100	40 mm			
WP 150	13,3 mm	15,5 mm	45,5 mm	
WP 200	22 mm	22 mm	50 mm	
WP 220	23 mm	25 mm	50 mm	
WP 250	19 mm	21 mm	71,5 mm	
WP 300	20,5 mm	22,5 mm	78 mm	
WB 200	16 mm	18 mm	85 mm	32 mm
WB 220	16 mm	18,5 mm	86 mm	33 mm
WB 250	26 mm	20 mm	84 mm	30 mm
WB 300	26 mm	22 mm	88 mm	34 mm

## ANCHORING CLIPS FOR WATERSTOPS

GREY UH POLYPROPYLENE

GREY HD POLYPROPYLENE  
pack. 1000 Pcs

Article		
CLPS		

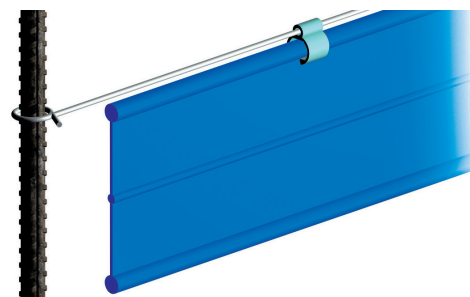

\* = Production on demand with minimum quantity of 10 rolls. Production delay 4/5 weeks. Price to be agreed.